





# PRO AUDIO CATALOGUE

Speaker | Microphone | Amplifier | Public Address System | Cable | Stand | Accessories

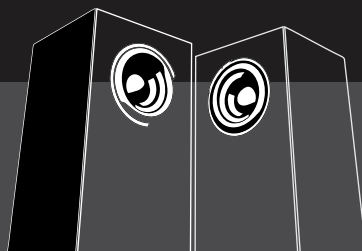

## 2018 - 2019 **NEW**

Global one Stop Supplier Of Pro Audio & Instrument

**3 years Warranty & 10 years after Sales service**



Under the license of Germany

## Company Profile



**Zico group** was established in 1978 and it is a very corporative group dedicatedly engages in R&D. Manufacturing, import and export, sale and international trade service of loud speaker and related performing equipment's.

We are very proud to introduce ourselves as one of the leading producer, distributor of audio products. Our main products include pro audio products particularly public address systems, such as speakers, amplifiers, microphones, cables and etc.

We are in Zico team eagerly opened our hands to receive your valuable consultation, suggestion and your useful ideas for start and handle a passible mutual cooperation and better quality and service. We look forward to improving our business not only in domestic markets but in outside markets in a long friendly terms of business.

# GLX Series

## Active & Passive Speaker

Active



GLX-15A



GLX-15



### Introduction of features:

The GLX series are built by rugged and ultra-light gas-injected polypropylene enclosure.

This elaborately design enclosure effectively avoid the forming of standing wave.

The high quality woofer features high power and low distortion, the compression driver is made by a 44mm PEEK diaphragm. GLX series deliver clear, smooth sound. Its outstanding sound capability can be maximum performed under high dynamic condition. The high efficiency "CLASS-D" amplifier adopts switching mode power of wide-range voltage from 100V-240V, which make GLX much lighter than the "CLASS-D" amplifier but getting the equal sound. GLX is equipped with three handles, which is more convenient for carry.

The GLX is designed for meeting room, multi-function hall, music hall, hotel, coffee bar, mosque etc.

### Features:

- >High efficiency "CLASS-D" amplifier, high power, low distortion, excellent sound quality.
- >Constant directivity horn for even coverage.
- >Rugged and ultra-light gas-injected polypropylene enclosure
- >EQ BOOST to optimize the frequency response, compressor limit LED indication, over heat LED indication.
- >Multi-angle cabinet design make GLX can be used for stage monitor.

### Features:

Model	GLX-15	GLX-15A
Type	15" 2-way Active Speaker	15" 2-way Passive Speaker
Frequency Response	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)
Sensitivity(1W@1m)	99dB	0dBu
Power Handling(RMS)	900W	800W
Coverage (H*V)	90°*60°	90°*60°
Crossover	1.8kHz	-----
Nominal Impedance	8Ω	-----
LF	1*15" Woofer	1*15" Woofer
HF	1*44mm HF compression driver	1*44mm HF compression driver
Max. SPL	131dB	127dB
Input Connector/Output Connector	2*SPEAKON	Combo(XLR / JACK),XLR
Dimension (W * H * D)	45*37*71	45*37*71
Net Weight	19 Kg	19.5 Kg
Rated Voltage	-----	AC 110 /230V,50-60Hz

# SX Series

## Active & Passive Speaker



### Introduction of features:

SX series is the new developed series with a more visually appealing outlook that designed by our company. The series of speakers can be used as monitoring sound system. All the active speakers are equipped with multi-function power amplifier that contains **USB, SD, Bluetooth, DSP, FM Radio, Recorder, WIFI** processor and etc. The active and passive series are suitable for various occasions, such as the medium and large-scale concert sound stage, stage monitors and commercial performances. All the speakers are made of high strength polypropylene materials, and molded through high-pressure injection molding machine. The speakers are equipped with high performance compression tweeter and high-power woofer, designed and tested accurately by professional device. In addition, this model has a flat frequency response and a high degree of sound reduction.

### Features:

Model	SX-8	SX-12	SX-12A	SX-15	SX-15A
Type	8" 2-way Passive	12" 2-way Passive	12" 2-way Active	15" 2-way Passive	15" 2-way Active
Frequency Response	75Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)
Sensitivity(1W@1m)	92dB	96 dB	96 dB	97dB	97dB
Power Handling(RMS)	350W	600W	500W	900W	800W
Coverage (H*V)	90°*40°	90°*60°	90°*60°	90°*60°	90°*60°
Crossover	2.7kHz	2.1kHz	2.1kHz	2.0kHz	2.0kHz
Nominal Impedance	8Ω	8Ω	-----	8Ω	-----
LF	1*8" Woofer	1*12" Woofer	1*12" Woofer	1*15" Woofer	1*15" Woofer
HF	1*25mm	1*44mm	1*44mm	1*44mm	1*44mm
Max. SPL	117dB	124dB	124dB	128dB	128dB
Input Connector/Output Connector	2*SPEAKON	2*SPEAKON	TRS,TRS	2*SPEAKON	TRS,TRS
Dimension (W * H * D)	24*23*38	32*31*58	32*31*58	44*38*70	44*38*70
Net Weight	4.5 Kg	16 Kg	18 Kg	22 Kg	23.5 Kg
Rated Voltage	-----	-----	AC 100 /240V	-----	AC 100 /240V



# PS Series

## Active & Passive Speaker

PS-215  
PS-215A



Active



Passive



PS-15  
PS-15A



Active



Passive



### Introduction of features:

PS series of professional engineering box using high precision acoustic instrument precision debugging, make its beautiful tone, voice thick, powerful dynamics; after the appearance with elaborate design can reflect more designers have great originality, mellow soft corner feeling letting a person from the appearance to the essence of the design will be able to. PS series of products using high-quality electrical components, high pitched more with over-current protection circuit design, can effectively improve the reliability and stability of the speaker voice. PS series can be made of various flexible appearance match to satisfy different occasions to product requirements. Can be used in conference rooms, multi-function hall, school and so on many occasions of speech reinforcement.

### Features:

Model	PS-15	PS-15A	PS-215	PS-215A
Type	15" 2-way Passive	15" 2-way Active	2*15" 2-way Passive	2*15" 2-way Active
Frequency Response	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)
Sensitivity(1W@1m)	95dB	0dBu	100dB	0dB
Power Handling(RMS)	800W	800W	1200W	1000W
Coverage (H*V)	90°*60°	90°*60°	90°*60°	90°*60°
Crossover	2.2kHz	2.2kHz	2.2kHz	2.2kHz
Nominal Impedance	8Ω	-----	4Ω	-----
LF	1*15" Woofer	1*15" Woofer	2*15" Woofer	2*15" Woofer
HF	1*44mm HF compression driver	1*44mm HF compression driver	1*44mm HF compression driver	1*44mm HF compression driver
Max. SPL	130dB	130dB	135dB	135dB
Input Connector/Output Connector	2*SPEAKON	TRS,TRS	2*SPEAKON	TRS,TRS
Dimension (W * H * D)	47.5*43*74	47.5*43*74	45*108*37	45*108*37
Net Weight	16.5 Kg	21 Kg	32 Kg	38 Kg
Rated Voltage	-----	AC 110 /230V	-----	AC 110 /230V

# NX Series

## Active & Passive Speaker

Active



NX-15  
NX-15A



NX-12  
NX-12A



NX Woofer



### Introduction of features:

NX series of active and passive speakers has high cost performance and high quality sound amplifying, active ones has class D digital amplifier, this active speaker is of excellent functions, perfect sound for high frequency, popular and excellent appearance with engineering plastic compact and durable, according to the different users and their usages. including Bluetooth, USB, Recording and Echo system.

### Features:

Model	NX-15	NX-15A	NX-12	NX-12A
Type	15" 2-way Passive Speaker	15" 2-way Active Speaker	12" 2-way Active Speaker	12" 2-way Active Speaker
Frequency Response	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)	50Hz~20kHz(-10dB)
Sensitivity(1W@1m)	95dB	0dBu	94dB	0dBu
Power Handling(RMS)	800W	800W	700W	600W
Coverage (H*V)	90°*60°	90°*60°	90°*60°	90°*60°
Crossover	2.2kHz	2.2kHz	2.2kHz	2.2kHz
Nominal Impedance	8Ω	-----	8Ω	-----
LF	1*15" Woofer	1*15" Woofer	1*12" Woofer	1*12" Woofer
HF	1*44mm HF compression driver	1*44mm HF compression driver	1*34mm HF compression driver	1*34mm HF compression driver
Max. SPL	130dB	130dB	128dB	128dB
Input Connector/Output Connector	2*SPEAKON	TRS,TRS	2*SPEAKON	TRS,TRS
Dimension (W * H * D)	47.5*71*40	47.5*71*40	41*61.5*34	41*61.5*34
Net Weight	23 Kg	28 Kg	14 Kg	17 Kg
Rated Voltage	-----	AC 110 /230V	-----	AC 110 /230V

# DX Series

Active & Passive Speaker

DX-150  
DX-150A

Active

Passive



DX-120  
DX-120A



DX-80  
DX-80A



DX series has been called as economic speaker which is more popular among our clients because of This type of plastic speaker, mostly owning of a modern design, looking good to be applied in many places, it owns an acceptable perfect sound quality accordance with its D class amplifier.DX series offers a pleasant options for customers such as, USB, Bluetooth, microphone inputs, radio recorder, extra band output and etc.

## Features:

Model	DX-80	DX-80A	DX-120	DX-120A	DX-150	DX-150A
Type	8" 2-way Passive	8" 2-way Active	12" 2-way Passive	12" 2-way Active	15" 2-way Passive	15" 2-way Active
Frequency Response	75Hz~20kHz (-10dB)	75Hz~20kHz (-10dB)	50Hz~20kHz (-10dB)	50Hz~20kHz (-10dB)	45Hz~20kHz (-10dB)	45Hz~20kHz (-10dB)
Sensitivity(1W@1m)	92dB	92dB	96 dB	96 dB	97dB	97dB
Power Handling(RMS)	350W	300W	500W	400W	700W	500W
Coverage (H*V)	90°*40°	90°*40°	90°*60°	90°*60°	90°*60°	90°*60°
Crossover	2.7kHz	2.7kHz	2.3kHz	2.3kHz	2.2kHz	2.2kHz
Nominal Impedance	8Ω	-----	8Ω	-----	8Ω	-----
LF	1*8" Woofer	1*8" Woofer	1*12" Woofer	1*12" Woofer	1*15" Woofer	1*15" Woofer
HF	1*25mm	1*25mm	1*25mm	1*25mm	1*34mm	1*34mm
Max. SPL	117dB	117dB	124dB	124dB	128dB	128dB
Input Connector/Output Connector	2*SPEAKON	TRS,TRS	2*SPEAKON	TRS,TRS	2*SPEAKON	TRS,TRS
Dimension (W * H * D)			40*60*33.5	40*60*33.5	45.5*71*39.5	45.5*71*39.5
Net Weight			12Kg	14.5 Kg	16 Kg	20 Kg
Rated Voltage	-----	AC 100/240V	-----	AC 100/240V	-----	AC 100/240V

# FS Series

## Wooden Passive Speaker



### Introduction of features:

Revisiting with modern materials of a simple and classic sound speaker.

The cabinet made of recyclable impact resistant wood and is equipped with 2 biconical 12" speakers designed to obtain great efficiency and extended range, for exceptional acoustic performance. Developed to combine performance in live applications with a robust and lightweight design.

### Features:

Model	FS-112	FS-112 plus	FS-112H	FS-212	FS-212 plus
Type	12" Full range Passive Speaker	12" Full range Passive Speaker	12" Full range Passive Speaker	2*12" Full range Passive Speaker	2*12" Full range Passive Speaker
Frequency Response	70Hz~12kHz(-10dB)	70Hz~12kHz(-10dB)	70Hz~12kHz(-10dB)	60Hz~20kHz(-10dB)	60Hz~20kHz(-10dB)
Sensitivity(1W@1m)	96dB	96dB	96dB	107dB	107dB
Power Handling(RMS)	300W	300W	300W	600W	600W
Coverage (H*V)	60°*60°	60°*60°	60°*60°	90°*60°	90°*60°
Nominal Impedance	16Ω	16Ω	16Ω	8Ω	8Ω
LF/HF	1*12" Full range	1*12" Full range	1*12" Full range	2*12" Full range	2*12" Full range
Max. SPL	98dB	98dB	98dB	126dB	126dB
Input Connector/Output Connector	2*TRS	2*TRS	2*TRS	2*TRS	2*TRS
Dimension (W * H * D)					
Net Weight					

# FS Series

## Wooden Passive Speaker

FS-1215



FS-215



FS-412



FS-215212



### Introduction of features:

Revisiting with modern materials of a simple and classic sound speaker.

The cabinet made of recyclable impact resistant wood and is equipped with 2 biconical 12" speakers designed to obtain great efficiency and extended range, for exceptional acoustic performance. Developed to combine performance in live applications with a robust and lightweight design.

### Features:

Model	FS-1215	FS-215	FS-412	FS-215212
Type	12"+15" Full range Passive Speaker	2*12" Full range Passive Speaker	4*12" Full range Passive Speaker	2*12"+2*15" Full range Passive Speaker
Frequency Response	60Hz~20kHz(-10dB)	60Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)	45Hz~20kHz(-10dB)
Sensitivity(1W@1m)	110dB	114dB	118dB	122dB
Power Handling(RMS)	700W	800W	1200W	1400W
Coverage (H*V)	90°*60°	90°*60°	90°*60°	90°*60°
Nominal Impedance	8Ω	8Ω	4Ω	4Ω
LF/HF	1*12"+1*15" Full range	2*15" Full range	4*12" Full range	2*12"+2*15" Full range
Max. SPL	127dB	128dB	129dB	131dB
Input Connector/Output Connector	2*TRS	2*TRS	2*TRS	2*TRS
Dimension (W * H * D)				
Net Weight				



## P Series

### Rechargeable Speaker

P-15W



P-16W



P-15



P-16



#### Features:

##### Model: P-15

Full range Configuration with active Filter

5" woofer

FREQ RESP: 60Hz - 20 KHz

USB, SD card, Radio, FM, Bluetooth,

Remote and Recorder

1 Way VHF Wireless Mic Input

1 Way Mic Input: TRS

Line Input: RCA

2 Band EQ (Treble and Bass)

Echo Processor (Echo and Delay)

Speaker Out: TRS

Max Power: 100W

Power Voltage: AC 220-240V

Built-in rechargeable battery (12V / 1.3AH)

Play time is at least 8 hours at maximal volume

Material: Wood

Dimension (W\*H\*D): 15\*19\*13

Weight: 2.6 Kg

#### Features:

##### Model: P-16

Full range Configuration with active Filter

6" woofer

FREQ RESP: 60Hz - 20 KHz

USB, SD card, Radio, FM, Bluetooth,

Remote and Recorder

1 Way VHF Wireless Mic Input

2 Way Mic Input: TRS

Line Input: RCA

2 Band EQ (Treble and Bass)

Echo Processor (Echo and Delay)

Speaker Out: TRS

Max Power: 150W

Power Voltage: AC 220-240V

Built-in rechargeable battery (12V / 4.5AH)

Play time is at least 8 hours at maximal volume

Material: Wood

Material: Wood

Dimension (W\*H\*D): 24\*28\*13

Weight: 4.5 Kg



## P Series

### Rechargeable Speaker

P-26W

P-12W



P-26

P-12



#### Features:

**Model: P-26**

Full range Configuration 2\*6 with active Filter  
6" woofer \* 2  
FREQ RESP: 60Hz - 30 KHz  
USB, SD card, Radio, FM, Bluetooth, Remote and Recorder  
1 Way VHF Wireless Mic Input  
2 Way Mic Input: TRS  
Line Input: RCA  
2 Band EQ (Treble and Bass)  
Echo Processor (Echo and Delay)  
Speaker Out: TRS  
Max Power: 300W  
Power Voltage: AC 220-240V / DC 12V  
Built-in rechargeable battery (12V / 4.5AH)  
Play time is at least 7 hours at maximal volume  
Material: Wood  
Dimension (W\*H\*D): 30\*40\*17.5  
Weight: 8.5 Kg

#### Features:

**Model: P-112**

Full range Configuration 12" with active Filter  
12" woofer  
FREQ RESP: 60Hz - 35 KHz  
USB, SD card, Radio, FM, Bluetooth, Remote and Recorder  
1 Way VHF Wireless Mic Input  
2 Way Mic Input: TRS  
Line Input: RCA  
2 Band EQ (Treble and Bass)  
Echo Processor (Echo and Delay)  
Speaker Out: TRS  
Max Power: 400W  
Power Voltage: AC 220-240V / DC 12V  
Built-in rechargeable battery (12V / 4.5AH)  
Play time is at least 6 hours at maximal volume  
Material: Wood  
Dimension (W\*H\*D): 35\*46\*24  
Weight: 14 Kg

# P Series

## Rechargeable Speaker

P-122W



P-126W



P-122W



P-126W



### Features:

#### Model: P-122

Full range Configuration 12" with active Filter  
 12" woofer  
 FREQ RESP: 60Hz - 35 KHz  
 USB, SD card, Radio, FM, Bluetooth, Remote and Recorder  
 1 Way VHF Wireless Mic Input  
 2 Way Mic Input: TRS  
 Line Input: RCA  
 2 Band EQ (Treble and Bass)  
 Echo Processor (Echo and Delay)  
 Speaker Out: TRS  
 Max Power: 400W  
 Power Voltage: AC 220-240V / DC 12V  
 Built-in rechargeable battery (12V / 4.5AH)  
 Play time is at least 6 hours at maximal volume  
 Material: ABS  
 Dimension (W\*H\*D): 38\*47\*30  
 Weight: 12 Kg

### Features:

#### Model: P-126

Full range Configuration 12" + 6" with active Filter  
 12" woofer and 6" woofer  
 FREQ RESP: 60Hz - 40 KHz  
 USB, SD card, Radio, FM, Bluetooth, Remote and Recorder  
 1 Way VHF Wireless Mic Input  
 2 Way Mic Input: TRS  
 Line Input: RCA  
 2 Band EQ (Treble and Bass)  
 Echo Processor (Echo and Delay)  
 Speaker Out: TRS  
 Max Power: 500W  
 Power Voltage: AC 220-240V / DC 12V  
 Built-in rechargeable battery (12V / 4.5AH)  
 Play time is at least 5 hours at maximal volume  
 Material: Wood  
 Dimension (W\*H\*D): 38\*58\*30  
 Weight: 15 Kg

# UHF Series

## Wireless Microphone



### Introduction of features:

Sturdy metal housing (transmitter and receiver)

42MHz bandwidth: 1,680 tunable UHF frequencies for interference-free reception

Enhanced frequency bank system with up to 12 compatible frequencies

High-quality true diversity reception

Pilot tone squelch for eliminating RF interference when transmitter is turned off

Automatic frequency scan feature searches for available frequencies

Enhanced AF frequency range

Increased range for audio sensitivity

Wireless synchronization of transmitters via infrared interface

User-friendly menu operation with more control options

Illuminated graphic display (transmitter and receiver)

Auto-Lock function avoids accidental changing of settings HDX compander for

crystal-clear sound Transmitter feature battery indication in four steps, also shown on receiver display

Handheld transmitter with easy-exchangeable microphone modules from evolution series Integrated Equalizer and

Soundcheck mode Contacts for recharging BA 2015 accupack (not included) directly in the transmitter A Band (516-558MHz)

Includes mic clip, power supply unit, two antennas, two stacking elements, two AA batteries, and instructions



### Receiver Specification:

Carrier Frequency: 590 – 890MHz

Receiving Mode: True Diversity

Max Channels: 100 \* 8

Max Frequencies: 100 \* 8

Bandwidth: 30MHz \* 2

Sensitivity: <-97dBm for 30db S/N Ratio

Frequency Response: 60 – 15000Hz

S/N Ratio: >105dB(A)

Harmonic Distortion: <0.5%

Dynamic Range: >100dB

Audio Input: XLR+jack

Antenna Input: 2 BNC , 50 OHM

Audio Output Level: XLR;+8dBumax

Power Supply: 12-18V DC/1000mA

Dimension (W\*H\*D): 21\*4.5\*14

### Transmitter Specification:

Carrier Frequency: 590 – 890MHz

Max Channels: 200

Output Power: 5 mW/30mW

Spurious Rejection: >70dBc

Bandwidth: 60MHz

Max Frequency adjustable range: +48KHz

Frequency Response: 60 – 15000Hz

S/N Ratio: >105dB(A)

Input Voltage Range: Mic1 Vmax

Power Supply: 2 \* 1.5V(AA)

Battery Life: >10h

# UHF Series

## Wireless Microphone



### Introduction of features:

Sturdy metal housing (transmitter and receiver)  
60MHz bandwidth: 1,680 tunable UHF frequencies for interference-free reception  
Enhanced frequency bank system with up to 12 compatible frequencies  
High-quality true diversity reception  
Pilot tone squelch for eliminating RF interference when transmitter is turned off  
Automatic frequency scan feature searches for available frequencies  
Enhanced AF frequency range  
Increased range for audio sensitivity  
Wireless synchronization of transmitters via infrared interface  
User-friendly menu operation with more control options  
Illuminated graphic display (transmitter and receiver)  
Auto-Lock function avoids accidental changing of settings  
HDX compander for crystal-clear sound  
Transmitter feature battery indication in four steps, also shown on receiver display  
Handheld transmitter with easy-exchangeable microphone modules from evolution series  
Integrated Equalizer and Soundcheck mode  
Contacts for recharging BA 2015 accupack (not included) directly in the transmitter  
A Band (590-890MHz)  
Includes power supply unit, four antennas, two stacking elements, two AA batteries, and instructions



### Receiver Specification:

Carrier Frequency: 590 – 890MHz  
Receiving Mode: True Diversity  
Max Channels: 100 \* 8  
Max Frequencies: 100 \* 8  
Bandwidth: 30MHz \* 2  
Sensitivity: <-97dBm for 30db S/N Ratio  
Frequency Response: 60 – 15000Hz  
S/N Ratio: >105dB(A)  
Harmonic Distortion: <0.5%  
Dynamic Range: >100dB  
Audio Input: XLR + jack  
Antenna Input: 4 BNC, 50 OHM  
Audio Output Level: XLR; +8dBumax  
Power Supply: 12 – 18V DC/1000mA  
Dimension (W\*H\*D): 48\*4.5\*20

### Transmitter Specification:

Carrier Frequency: 590 – 890MHz  
Max Channels: 200  
Output Power: 5mW/30mW  
Spurious Rejection: >70dBc  
Bandwidth: 60MHz  
Max Frequency adjustable range: +48KHz  
Frequency Response: 60 – 15000Hz  
S/N Ratio: >105dB(A)  
Input Voltage Range: Mic1 Vmax  
Power Supply: 2 \* 1.5V (AA)  
Battery Life: >10h

# UHF Series

## Wireless Microphone



### Introduction of features:

Automatic frequency scan feature, searches for available frequencies.

The LCD display shows the RF and AF level, battery status, channel indication (A/B), frequency group, etc..

The transmitter LCD display the operating frequency, battery status.

The operating frequency of each channel is the same, so can be interchanged, flexible operation.

Application: KTV room, school room, multimedia room, and family entertainment.



### System Specifications

Frequency range: 740-790 MHz

Modulation mode: FM

Frequency interval: 50MHz

Channels: 200

Channel spacing: 300KHz

Frequency stability:  $\pm 0.005\%$

Dynamic range: 100dB

Frequency response: 40Hz-18KHz( $\pm 2$ dB)

SNR: $>105$  dB

Distortion:  $<0.5\%$

Dimension (W\*H\*D):48\*4.5\*20

### Receiver Specifications

Intermediate Frequency: 110MHz, 10.7MHz

Wireless interface: BNC/50 OHM

Sensitivity: 12dB V (80dBs/N)

Sensitivity range: 12-32 dB V

Stray rejection: $>75$ dB

Max output level: +10dBV

Power supply: 12V 400mA

### Transmitter Specifications

High power: 30mW

Low power: 3mW

Spurious Suppression: -60dB

Power Supply: 3pcs AA batteries

Playtime:  $>13$  hrs



# UHF Series

## Wireless Microphone

UR-1000H



UR-1000C



### Introduction of features:

Sturdy metal housing (transmitter and receiver)

60MHz bandwidth: 1,680 tunable UHF frequencies for interference-free reception

Enhanced frequency bank system with up to 12 compatible frequencies

High-quality true diversity reception

Pilot tone squelch for eliminating RF interference when transmitter is turned off

Automatic frequency scan feature searches for available frequencies

Enhanced AF frequency range

Increased range for audio sensitivity

Wireless synchronization of transmitters via infrared interface

User-friendly menu operation with more control options

Illuminated graphic display (transmitter and receiver)

Auto-Lock function avoids accidental changing of settings

HDX compander for crystal-clear sound

Transmitter feature battery indication in four steps, also shown on receiver display

Handheld transmitter with easy-exchangeable microphone modules from evolution series

Integrated Equalizer and Soundcheck mode

Contacts for recharging BA 2015 accupack (not included) directly in the transmitter A Band (590-890MHz)

Includes power supply unit, four antennas, two stacking elements, two AA batteries, and instructions

UR-1000HC



### Receiver Specification:

Carrier Frequency: 590 – 890MHz

Receiving Mode: True Diversity

Max Channels: 100 \* 8

Max Frequencies: 100 \* 8

Bandwidth: 30MHz \* 2

Sensitivity: <-97dBm for 30db S/N Ratio

Frequency Response: 60 – 15000Hz

S/N Ratio: >105dB(A)

Harmonic Distortion: <0.5%

Dynamic Range: >100dB

Audio Input: XLR + jack

Antenna Input: 4 BNC, 50 OHM

Audio Output Level: XLR; +8dBumax

Power Supply: 12 – 18V DC/1000mA

Dimension (W\*H\*D): 48\*4.5\*20

### Transmitter Specification:

Carrier Frequency: 590 – 890MHz

Max Channels: 200

Output Power: 5mW/30mW

Spurious Rejection: >70dBc

Bandwidth: 60MHz

Max Frequency adjustable range: +48KHz

Frequency Response: 60 – 15000Hz

S/N Ratio: >105dB(A)

Input Voltage Range: Mic1 Vmax

Power Supply: 2 \* 1.5V (AA)

Battery Life: >10h





# UHF Series

## Wireless Microphone



### Introduction of features:

150 - 200m operating area

Selected UHF frequency to avoid interference

Feedback rejection function can effectively reduce howling

Optional mixed or individual output

The conference / handheld / bodypack transmitter can mix use.

Application: Conference room, school room, multimedia room, family entertainment and outdoor performance

### System Specifications:

Frequency Response: 80Hz-15KHz

Frequency Steadiness:  $\pm 0.005\%$

S/N Ratio:  $>70\text{dB}$

Total Harmonic Distortion:  $<0.5\%$  (at 1 KHz)

Sensitivity:  $-80\text{dBm}$

Operation Range: 50m in open area

Harmonic Interference Rate:  $>50\text{dB}$

False Image Interference Rate:  $>80\text{dB}$

Receiver Power Supply: DC 12V/500Ma

Transmitter Power Supply: AA1.5V \* 2 (batteries)

Transmit Power:  $<10\text{mA}$

Color for Frequencies: 220-270MHz

Output Type: (Separate or mixed output)

Dimension (W\*H\*D):  $21*3*14$

# UHF Series

## Wireless Microphone



### Introduction of features:

80-100m operating area

Selected UHF frequency to avoid interference

Feedback rejection function can effectively reduce howling

Optional mixed or individual output

The conference / handheld / bodypack transmitter can mix use.

Application: Conference room, school room, multimedia room,  
family entertainment and outdoor performance



### System Specifications:

Frequency Response: 80Hz-15KHz

Frequency Steadiness:  $\pm 0.005\%$

S/N Ratio:  $>70\text{dB}$

Total Harmonic Distortion:  $<0.5\%$  (at 1 KHz)

Sensitivity:  $-80\text{dBm}$

Operation Range: 50m in open area

Harmonic Interference Rate:  $>50\text{dB}$

False Image Interference Rate:  $>80\text{dB}$

Receiver Power Supply: DC 12V/500Ma

Transmitter Power Supply: AA1.5V \* 2 (batteries)

Transmit Power:  $<10\text{mA}$

Color for Frequencies: 220-270MHz

Output Type: (Separate or mixed output)

Dimension (W\*H\*D): 21\*3\*14

# UHF Series

## Wireless Microphone



### Introduction of features:

100 - 150m operating area

Selected UHF frequency to avoid interference

Feedback rejection function can effectively reduce howling

Optional mixed or individual output

The conference / handheld / bodypack transmitter can mix use.

Application: Conference room, school room, multimedia room

family entertainment and outdoor performance

### System Specifications

Frequency Response: 80Hz-15KHz

Frequency Steadiness:  $\pm 0.005\%$

S/N Ratio:  $>70\text{dB}$

Total Harmonic Distortion:  $<0.5\%$  (at 1 KHz)

Sensitivity:  $-80\text{dBm}$

Operation Range: 50m in open area

Harmonic Interference Rate:  $>50\text{dB}$

False Image Interference Rate:  $>80\text{dB}$

Receiver Power Supply: DC 12V/500Ma

Transmitter Power Supply: AA1.5V \* 2 (batteries)

Transmit Power:  $<10\text{mA}$

Color for Frequencies: 220-270MHz

Output Type: (Separate or mixed output)

Dimension (W\*H\*D): 42\*4.5\*18



# UHF Series

## Wireless Microphone



### Introduction of features:

150-200m operating area

Selected UHF frequency to avoid interference

Feedback rejection function can effectively reduce howling

Optional mixed or individual output

The conference / handheld / bodypack transmitter can mix use.

Application: Conference room, school room, multimedia room, family entertainment and outdoor performance



### System Specifications

Frequency Response: 80Hz-15KHz

Frequency Steadiness:  $\pm 0.005\%$

S/N Ratio:  $>70\text{dB}$

Total Harmonic Distortion:  $<0.5\%$  (at 1 KHz)

Sensitivity:  $-80\text{dBm}$

Operation Range: 150m in open area

Harmonic Interference Rate:  $>50\text{dB}$

False Image Interference Rate:  $>80\text{dB}$

Receiver Power Supply: DC 12V/500Ma

Transmitter Power Supply: AA1.5V \* 2 (batteries)

Transmit Power:  $<10\text{mA}$

Color for Frequencies: 220-270MHz

Output Type: (Separate or mixed output)

Dimension (W\*H\*D): 48\*4.5\*20



# UHF Series

## Wireless Microphone



### Introduction of features:

Perfect for vocal transmission or recording for both beginners or professional.

This Zico professional uhf dynamic wireless microphone system provides clear vocal sound.

Both the mini receiver and microphone body are made of aluminum alloy, sturdy and lightweight.

These professional wireless handle or body pack microphones offer a great frequency response with cardioid pickup pattern to isolate the primary sound source and minimize background noise , it offers pristine vocal sound



### System Specifications

Frequency: UHF 500 – 980MHz

Frequency Response: 75Hz-18KHz

Dynamic Range: >98dB

Receive Distance: Up to 200m

Power supply: lithium rechargeable battery

Battery life: Up to 8 hours

Receiver battery type: USB rechargeable

Includes: 1\*handheld microphone /1\*6.5mm receiver/

1\*USB charging cable/1\*manual/

1\*receiver battery/1\*sponge

Material: Metal

## Dynamic Series

### Wire Microphone

DM-3500



DM-3000



DM-2500



DM-2200



#### Features:

##### DM-3500

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 60Hz – 14KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -54( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

##### DM-3000

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 14KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -52 ( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight (g):

##### DM-2500

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 17KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -51( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

##### DM-2200

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 60Hz – 16KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -51( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):



## Dynamic Series

### Wire Microphone

DM-2000



DM-1500



DM-1000



DM-900



#### DM-2000

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 15KHz

Output Impedance: 600 ohm (+/- 15%)

Sensitivity: -52( +3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

#### DM-1500

Material: Zinc alloy

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 14KHz

Output Impedance: 600 ohm (+/- 30%)

Sensitivity: -74( +3)dB (at 1KHz) (0dB=1V/Pa)

Weight(g):

#### DM-1000

Specification

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 60Hz – 15KHz

Output Impedance: 600 ohm (+/- 15%)

Sensitivity: -52( +3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

#### DM-900

Specification

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 14KHz

Output Impedance: 600 ohm (+/- 30%)

Sensitivity: -74( +3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

## Dynamic Series

### Wire Microphone

**DM-400**



**DM-500**



**DM-700**



#### **DM-700**

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 50Hz – 14KHz

Output Impedance: 600 ohm (+- 30%)

Sensitivity: -74( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Zinc alloy

Weight(g):

#### **DM-500**

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 60Hz – 15KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -52( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Plastic

Weight(g):

#### **DM-400**

Type: Dynamic

Polar pattern: Unidirectional

Frequency response: 60Hz – 15KHz

Output Impedance: 600 ohm (+- 15%)

Sensitivity: -52( +-3)dB (at 1KHz) (0dB=1V/Pa)

Material: Plastic

Weight(g):

## D Series

### Desktop Microphone



D-2000



D-1000

#### D-2000

##### Application:

Conference, speech, online voice chat,  
PC recording and broadcasting

##### Technical Parameters:

Transducer Principle: Back Electret Condenser

Polar Pattern: Supercardioid

Frequency Response: 50Hz to 16 KHz

Audio output: balanced output

Sensitivity: -47dB  $3\text{dB}(F=1\text{KHz}, S.P.L=1\text{Pa}, 0\text{dB}=1\text{V/Pa})$

Output Impedance(OHM): 1600OHM 20%

Power Supply: DC3V(2 pcs AAA battery)/

DC9V (With Adapter)/ Phantom 48V

Reference Sound Receiving Distance: 80 cm

Cable: 5M

Color: White , Grey , Black



#### D-1000

##### Application:

Conference, speech, online voice chat,  
PC recording and broadcasting

##### Technical Parameters:

Transducer Principle: Back Electret Condenser

Polar Pattern: Supercardioid

Frequency Response: 40Hz to 16 KHz

Audio output: balanced output

Sensitivity: -40dB  $2\text{dB}(F=1\text{KHz}, S.P.L=1\text{Pa}, 0\text{dB}=1\text{V/Pa})$

Output Impedance(OHM): 75 OHM

Power Supply: DC3V(2 pcs AAA battery)/

DC9V (With Adapter)/ Phantom 48V

Reference Sound Receiving Distance: 65 cm


Cable: 5M

Color: Black

# Dynamic Series

## Wire Microphone

H-100U

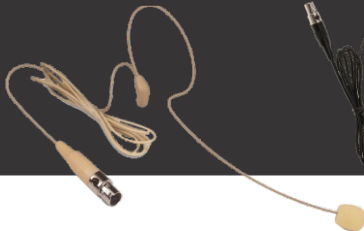

H-100UB



H-100V



H-1000D



### Features

- Most comfortable-to-use presenter microphone
- Outstanding sound quality, omni-directional
- Sleek and unobtrusive appearance
- Extremely lightweight, but sturdy metal frame
- Soft-case for convenient transport and storage
- Available in beige

Model: H-100U

Microphone Type: Condenser

Polar Pattern: Omni

Compatibility: All Zico UHF Microphones (TD-1, TD-9000, UR-1000, UH-50)

Frequency Response: 20Hz-20 kHz

Max SPL: 107dB SPL

Signal to Noise Ratio: 60dB

Self-Noise: 34dB

Connector: Mini XLR

Cable Length: 1.3m

Color: Beige

Weight: 20 grams

### Features

- Most comfortable-to-use presenter microphone
- Outstanding sound quality, omni-directional
- Sleek and unobtrusive appearance
- Extremely lightweight, but sturdy metal frame
- Soft-case for convenient transport and storage
- Available in black

Model: H-100UB

Microphone Type: Condenser

Polar Pattern: Omni

Compatibility: All Zico UHF Microphones (TD-1, TD-9000, UR-1000, UH-50)

Frequency Response: 20Hz-20 kHz

Max SPL: 107dB SPL

Signal to Noise Ratio: 60dB

Self-Noise: 34dB

Connector: Mini XLR

Cable Length: 1.3m

Color: Black

Weight: 35 grams

### Features

- Most comfortable-to-use presenter microphone
- Outstanding sound quality, omni-directional
- Sleek and unobtrusive appearance
- Extremely lightweight, but sturdy metal frame
- Soft-case for convenient transport and storage
- Available in black and beige

Model: H-100V

Microphone Type: Condenser

Polar Pattern: Omni

Compatibility: All Zico UHF Microphones (U-100, U-200, UR-89, V-200)

Frequency Response: 20Hz-20 kHz

Max SPL: 130dB SPL

Signal to Noise Ratio: 60dB

Self-Noise: 29dB

Connector: 3.5mm

Cable Length: 1.3m

Color: Beige/Black

Weight: 38 grams

### Features

- Most comfortable-to-use presenter microphone
- Outstanding sound quality, omni-directional
- Sleek and unobtrusive appearance
- Extremely lightweight, but sturdy metal frame
- Soft-case for convenient transport and storage
- Available in black and beige

Model: H-1000D

Microphone Type: Dynamic

Polar Pattern: Cardioid

Frequency Response: 50Hz-15 kHz

Connector: TRS

Cable Length: 5m

Color: Black

Weight: 65 grams

## Z Series

### Wire Microphone

**Z-100U**



**Z-100V**



**Z-1000**



**Z-2000**



#### **Z-100u**

Polar Pattern : Cardioid

Frequency Response: 40-16,000 Hz

Maximum Input Sound Level: 135 Db Spl, 1 Khz At 1% T.h.d.

Open Circuit Sensitivity: -44 Db (6.3 Mv) Re 1v At 1 Pa

Signal-to-noise Ratio: 65 Db, 1 Khz At 1 Pa

Connector: Mini Xlr

Cable: 1.5m

#### **Z-100V**

Polar Pattern : Cardioid

Frequency Response: 40-16,000 Hz

Maximum Input Sound Level: 135 Db Spl, 1 Khz At 1% T.h.d.

Open Circuit Sensitivity: -44 Db (6.3 Mv) Re 1v At 1 Pa

Signal-to-noise Ratio: 65 Db, 1 Khz At 1 Pa

Connector: 3.5mm

Cable: 1.5m

#### **Z-1000**

Polar Pattern : Cardioid

Frequency Response: 20-20,000 Hz

Maximum Input Sound Level: 118 Db Spl, 1 Khz At 1% T.h.d.

Open Circuit Sensitivity: 10 Mv/pa

Signal-to-noise Ratio: 52 Db, 1 Khz At 1 Pa

Connector: Trs

Cable: 5m

#### **Z-2000**

Polar Pattern : Omni

Frequency Response: 20-20,000 Hz

Maximum Input Sound Level: 118 Db Spl, 1 Khz At 1% T.h.d.

Open Circuit Sensitivity: 10 Mv/pa

Signal-to-noise Ratio: 52 Db, 1 Khz At 1 Pa

Connector: Trs

Cable: 10m

#### **GM-8000**

Transducer Principle: Back Electret Condenser(O 14mm)

Power Requirement: 9-52V Phantom power or 1.5V AA battery

Polar Pattern: Supercardioid

Output Impedance(OHM): 200OHM + -20%

Sensitivity: -47dB+ -3dB (F=1KHz, S.P.L=1Pa, 0dB=1V/Pa)

Frequency Response: 20Hz to 16KHz (F=1KHz)

Switch: pull switch

Battery continuous use time: > 800 hours (AA battery)

Cable: 5m

**GM-8000**



## C Series

### Catridge

C-3500

C-3000

C-2500

C-2200

C-2000

C-1500



#### C-3500

Impedance: 600Ω

Sensitivity: -52(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 50 Hz ~15 KHz

Pattern: Unidirectional

Weight: 40.5g

#### C-3000

Impedance: 600Ω

Sensitivity: -49(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~13 KHz

Pattern: Unidirectional

Weight: 44g

#### C-2500

Impedance: 600Ω

Sensitivity: -50(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 50 Hz ~13 KHz

Pattern: Unidirectional

Weight: 57g

#### C-2200

Impedance: 600Ω

Sensitivity: -51(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~16 KHz

Pattern: Unidirectional

Weight: 51g

#### C-2000

Impedance: 600Ω

Sensitivity: -51(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~16 KHz

Pattern: Unidirectional

Weight: 51g

#### C-1500

Impedance: 600Ω

Sensitivity: -52(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 50 Hz ~15 KHz

Pattern: Unidirectional

Weight: 44g



## C Series

### Catridge

C-1000



C-750



C-500



C-400



C-100



#### C-1000

Impedance: 600Ω

Sensitivity: -52(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~15 KHz

Pattern: Unidirectional

Weight: 44g

#### C-750

Impedance: 600Ω

Sensitivity: -53(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 50 Hz ~16 KHz

Pattern: Unidirectional

Weight: 50g

#### C-500

Impedance: 600Ω

Sensitivity: -52(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~15 KHz

Pattern: Unidirectional

Weight: 41g

#### C-400

Impedance: 600Ω

Sensitivity: -52(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~15 KHz

Pattern: Unidirectional

Weight: 41g

#### C-100

Impedance: 600Ω

Sensitivity: -53(±3) dB (at 1 KHz) (0dB=1V/Pa)

Frequency response: 60 Hz ~15 KHz

Pattern: Unidirectional

Weight: 51g

## ZA Series

### Amplifire

ZA-120 ( Front )



ZA-120 ( Back )



#### Introduction of features:

The mixer amplifier have power ratings 120w. They are featured of one microphone inputs, one aux input and one aux output.

Individual gain controls are provided for Mp3,

Bluetooth, AUX, MIC, Treble and Bass controls. 70V, 100V and low impedance 4-16 ohms speaker outputs are provided.

Extensive protection from short-circuit, overload and high temp.

#### Features

Built-in MP3 player and FM tuner and remote control.

MP3 Player with USB, Bluetooth, SD port and fluorescent screen to display the sound number and sound name.

Four function buttons: previous, play/stop, next and mode.

70V, 100V and low impedance 4-16 ohms speaker output.

One Mic input by phone jack type.

Mic volume controls and bass/treble tone control.

High temp, overload and short-circuit protection.

#### Specifications

Rated Power Output: 120W

Speaker outputs: 70V, 100V and low impedance 4-16 ohms

Input Sensitivity & Impedance : Mic -55dB/600Ω, Unbalanced phone jack input

Aux -14dB/10KΩ, Unbalanced RCA input.

Tone: Bass: +-10dB at 100Hz

Treble: +-10dB at 10KHz

Frequency Response: 40Hz-18KHz(+3dB)

S/N Ratio : MIC: >70dB, AUX:>76dB

THD: Less than 0.2% at the 1KHz

MP3 Support Format : MP3, WMA

Maximum Support Capacity: 16GB USB drive

Power Supply: ~110V/60Hz or ~230V/50Hz

Dimensions: 315 \* 270 \* 120mm

Color: Black



## ZA Series

### Amplifier

ZA-550



ZA-1000



#### Introduction of features:

The ZA series mixer amplifier have power ratings from 550W, 1000W.

They are featured of three microphone inputs, two aux input and one aux output.

Individual gain controls are provided for MP3, Bluetooth, AUX, MIC, Treble, Bass controls.

70V, 100V and low impedance 4-16 ohms speaker outputs are provided.

Extensive protection from short-circuit, overload and high temp.

#### Features

Built-in MP3 player and FM tuner and remote control.

MP3 Player with USB, Bluetooth, SD port and fluorescent screen to display the sound number and sound name.

Four function buttons: previous, play/stop, next and mode.

70V, 100V and low impedance 4-16 ohms speaker output.

5 zone individual volume control and all zone speaker output.

Three Mic input by phone jack type.

AUX 1-2, Mic1-3 volume controls and bass/treble tone control.

High temp, overload and short-circuit protection.

#### Specifications :

Model	ZA-550	ZA-1000
Rated Power Output	550W	1000W
Speaker outputs	70V, 100V and low impedance 4-16 ohms	
Input Sensitivity & Impedance	Mic -55dB/600Ω, Unbalanced phone jack input Aux -14dB/10KΩ, Unbalanced RCA input.	
Tone:	Bass: $\pm 10\text{dB}$ at 100Hz	Treble: $\pm 10\text{dB}$ at 10KHz
Frequency Response	40Hz-18KHz( $\pm 3\text{dB}$ )	
S/N Ratio	MIC: >70dB, AUX: >76dB	
THD	Less than 0.1% at the 1KHz	
Mp3 Support Format	Mp3, WMA	
Maximum Support Capacity	16GB USB drive	
Protection	High temp, overload and short-circuit	
Power Supply	~110V/60Hz or ~230V/50Hz	
Dimensions	525 * 400 * 165mm	
Color	Black	


BACK




## CS Series

### Ceiling Speaker


CS-45



CS-46



CS-48

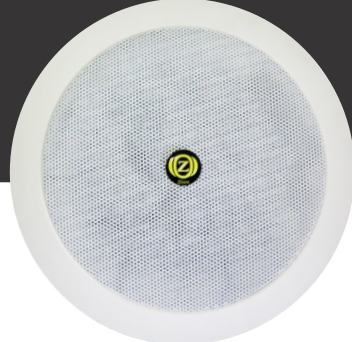

#### CS-45

Type: Two way

Power (RMS): 10W/20W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-18KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 5.25"

Cutout Dimensions: 165mm

Overall Dimensions: 203 \* 70mm

Color: White

#### CS-46

Type: Two Way

Power (RMS): 20W/30W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-18KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 6.5"

Cutout Dimensions: 198mm

Overall Dimensions: 230 \* 70mm

Color: White

#### CS-48

Type: Two way

Power (RMS): 30W/40W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 55-18KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 8"

Cutout Dimensions: 243mm

Overall Dimensions: 276 \* 105mm

Color: White



## CS Series

### Ceiling Speaker

CS-22



CS-33



CS-35



CS-36



#### CS-22

Type: One way

Power (RMS): 5W/10W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-16KHz

Sensitivity (1w/1m): 90dB

Speaker (woofer): 5"

Cutout Dimensions: Ming loaded

Overall Dimensions: 180 \* 70mm

Color: White

#### CS-33 Waterproof

Type: One way

Power (RMS): 3W/6W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 95-15KHz

Sensitivity (1w/1m): 88dB

Speaker (woofer): 3"

Cutout Dimensions: 100mm

Overall Dimensions: 120 \* 80mm

Color: White

#### CS-35

Type: One way

Power (RMS): 3W/6W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 80-18KHz

Sensitivity (1w/1m): 90dB

Speaker (woofer): 5"

Cutout Dimensions: 150mm

Overall Dimensions: 185 \* 58mm

Color: White

#### CS-36

Type: One way

Power (RMS): 5W/10W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-16KHz


Sensitivity (1w/1m): 91dB

Speaker (woofer): 6"

Cutout Dimensions: 165mm

Overall Dimensions: 190 \* 70mm

Color: White, Black




## WS Series

### Wall Mounted Speaker


**WS-11**



**WS-16**



**WS-55**



#### **WS-11**

Type: Two way

Power (RMS): 5W/10W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-16KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 6.5"

Dimensions: 273 \* 200 \* 100mm

Color: White

#### **WS-16**

Type: Two way

Power (RMS): 10W/20W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-18KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 6.5"

Dimensions: 265 \* 205 \* 105mm

Color: White

#### **WS-55**

Type: Two way

Power (RMS): 5W/10W

Impedance: 8 ohms

Line Voltage: 70V/100V AC

Frequency: 90-16KHz

Sensitivity (1w/1m): 91dB

Speaker (woofer): 6.5"

Dimensions: 270 \* 200 \* 100mm

Color: White



## WS Series

### Decorate Speaker



#### Introduction of features:

4", 5.25", 6.5", 8" woofer for selection

Built-in crossover and transformer

Equipped with Hi-Fi speaker drivers

High power output, high sensitivity and high sound pressure level

Aluminum speaker grill, free from rust and corrosion

#### Switch transformer



#### Specifications :

Model	WS-40EX	WS-50EX	WS-65EX	WS-65T
Impedance	8 ohms	8 ohms	8 ohms	8 ohms
Woofer	4"	5.25"	6.5"	6.5"
Tweeter	0.5"(13mm)Mylar Dome	0.5"(13mm)Mylar Dome	1"(25mm)Dome loudspeaker	1"(25mm)Dome loudspeaker
Sensitivity	85dB/M/W	86+- 2dB/M/W	88+- 2dB/M/W	88+- 2dB/M/W
Frequency	90Hz-18KHz	90Hz-18KHz(-10dB)	70-20KHz(-10dB)	70-20KHz(-10dB)
Power(RMS)	40W	60W	80W	85W
Overall Dimensions	14.5W*13D*22.5H cm	17W*13D*25H cm	21W*14D*28H cm	21.5W*19.5D*28.5H cm
Color	White/Black	White/Black	White/Black	White/Black
Option	2.5w-5w-10w-20w/100V	3.75w-7.5w-15w-30w/100V	7.5w-15w-30w-60w/100V	7.5w-15w-30w-60w/100V
Switch transformer				

# ST Series

## Coloun Speaker



### Introduction of features:

- Speaker design for excellent sound quality
- Wind-proof and rain-proof speaker enclosure
- C-type installation bracket included

### Specifications :

Model	ST-200	ST-400	ST-600	ST-800
Speaker Unit	3"	3"	3"	3"
Power(RMS)	10W	20W	30W	40W
Frequency	70-15KHz	70-15KHz	70-15KHz	70-15KHz
Line Voltage	70V/100V AC	70V/100V AC	70V/100V AC	70V/100V AC
Sensitivity(1w/1m)	90dB	90dB	90dB	90dB
Dimensions(mm)	190*70*70	280*70*70	380*70*70	470*70*70
Material	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy



## TYM Series

### Microphone Stand



#### TYM-33

Base Diameter: 17\*14cm

Tube Spec: 1.5\*33cm

Weight: 0.7kg

Material: Iron

#### TYM-19

Height Adjustment Range: 38-52cm

Cross Bar Length: 42cm

Base Diameter: 17.5cm

Weight: 1.7kg

Material: Aluminum alloy

Color: Chrome/Black

#### TYM-11

Height Adjustment Range: 90-152cm

Base Diameter: 22.5cm

Weight: 2.3kg

Material: Steel

Color: Chrome/Black Connectors

#### TYM-52

Height Adjustment Range: 92-158cm

Cross Bar Length: 78cm

Weight: 2.3kg

Material: Aluminum alloy

Color: Black

#### TYM-54

Height Adjustment Range: 92-158cm

Cross Bar Length: 78cm

Weight: 2.3kg

Material: Aluminum alloy

Color: Black

## TYS Series

### Speaker Stand



#### **TYS-04**

Height Adjustment Range: 100-180cm

Weight: 3.2Kg

Load capacity: 60Kg

Color: Blackk



#### **TYS-02**

Height Adjustment Range: 110-200cm

Weight: 3.5Kg

Load capacity: 60Kg

Color: Black



#### **TYS-15**

Load Weight: 35kg

Material: Sheet iron

Color: Black

# SC & PC Series

## Cable

SC-3500



PC-1000



### SC-2500 & SC-3500

#### Introduction of features:

Application: Performance, mobile show, installation.  
OFC wire twisting as core conductor, insulation  
PE can prevent conductor from oxidation, reduce  
high-frequency signal attenuation efficiently.  
Apply to LF, audio, multiple speaker, loudspeaker,  
high power amplifier connection.  
Operating tem: -20C +70C  
Package: Shaftless bulk 90m/roll

#### Technical Parameters:

Diameter: 6.5mm  
Jacket: Matt translucence PVC  
Shield: Semiconductor + tinned OFC & tinsel wire twining  
Conductor: 18 \* 0.10mm OFC & tinsel wire twining  
Core wire array: 2 core twisted-pair + cotton yarn  
Insulation material: PE  
Cond. Section: 2 \* 0.521 mm2 (20AWG)  
Cond. Resist: <96Ω/K  
Insulation resist: >1GΩ/KM  
Operating tem: -20C +70C  
Package: 100m /roll

### PC-1000

#### Introduction of features:

Use OFC and tinsel wire twine as conductor, ensure good  
signal transmission and clear sound.  
Stable shielding effect—The core surface is high quality  
semiconductor shield, and extra tinned OFC + tinsel  
wire twine together as double—shielding, cut off external  
electromagnetic interference efficiently.  
High quality material and reasonable design, cable is with  
good tensile strength.  
Swing frequency can reach more than 230,000 times.  
Flexible and durable jacket, feel good, color variety.

#### Applications:

Performance    Mobile show    Long distance stage application  
Microphone technology    Active Speaker

Model	SC-2500	SC-3500
Conductor structure	79/0.20	127/0.20
Diameter mm	5.0*10.0	6.0*12.0
Cond section – Selection mm2	2*2.5	2*4.0
Cond section - AWG	13	11
Cond. Resist Ω/KM	=<7.6	=<4.8
Insulation resist Ω/KM	>=1	>=1
Package	90m/roll	90m/roll



PC-1000

## ZF Series



### Introduction of features:

If what you really like is to have your speakers shouting at you, then the F-400 and F-500 series is simply perfect.




F series that will not allow for fine ears, determined to give lovers of extremely loud volumes exactly what they want, without renouncing quality.

The f series throws back the doors of the medium high rang for those choosing it , growling out sound pressure of true combatants to satisfy the most extreme demands in terms of power and quality.

## Accessories



## An epitome of Zico product supply chain



[www.zicoaudio.com](http://www.zicoaudio.com)

Zico Group (Zico Electronics & Sound Co.,Ltd.)  
Email: [Info@zicoaudio.com](mailto:Info@zicoaudio.com)



zicoaudio



zicoaudio



zicoaudio

